

# PIT CONCRETE MANHOLE PF12T

Product Code: 50201477




Infrastructure Products Australia work closely with key industry groups and authorities to develop its extensive precast concrete manhole range, delivering innovative project solutions proven for strength, durability and consideration of unique sector requirements.

 MATERIAL  
Precast Concrete

 SIZE  
2900mm (L) x 1380mm (W) x 1750mm (D)

 LOAD RATING  
D

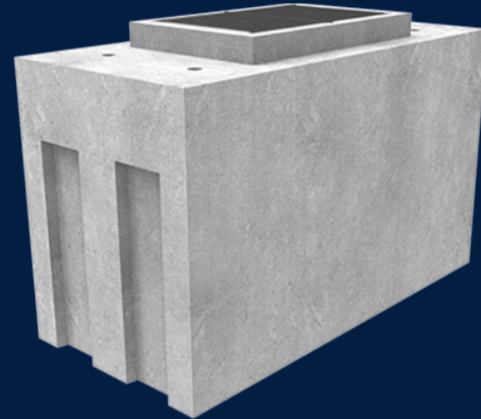

## Features & benefits

### Market leading Manhole manufacturing


We have matched the load rating of the pit to its cover, you'll find our cover options with this pit below. This design element provides long term confidence in the quality and endurance of the product.

### Bespoke Capabilities

Customisation of our precast concrete cable pits is available to suit the unique requirements of your project so that you can be confident you're getting exactly what you need.

### Accessories Supplied

Pit is supplied with 50mm drainage hole, drainage sump and Unistrut

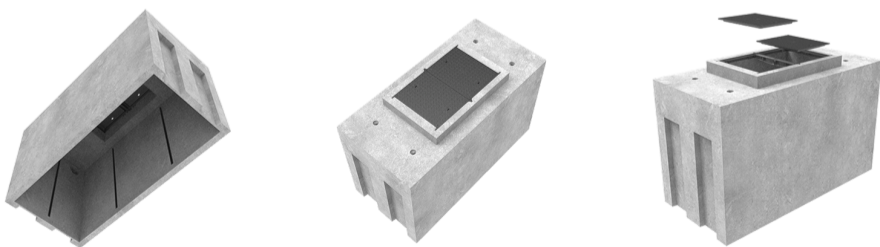

## Full specifications

Material	High strength concrete has a compressive strength of 40MPa or greater. Infrastructure Products Australia manufactures their precast concrete cable pits using a fibre reinforced concrete mix to ensure a minimum of 40MPa. This attests to our pits remaining durable and robust throughout their lifetime.
Australian Standards	Our standard precast concrete manholes are designed and built up to a Class D load rating, meeting the Australian Standard AS/NZ 3996. We also use minimum 40MPa concrete to ensure robustness and superior asset protection.
Load Rating	Precast concrete manholes are manufactured up to a Class D load rating (ultimate limit state design of 240kN).

Contact Us

Email: [sales@cubis-systems.com.au](mailto:sales@cubis-systems.com.au)

Phone: 1800 665 356