

MANHOLE SIDE MEMBER 1860MM

Product Code: 50201160




Infrastructure Products Australia' robust cast iron cover range is used across a variety of industry sectors including telecommunications, energy, rail, defence, tradewaste and stormwater. Our cast iron cover range delivers solutions proven for their strength and durability.

 MATERIAL
Ductile Cast Iron

 SIZE
1860mm (L) x 70mm (W) x 60mm (D)

 LOAD RATING
D

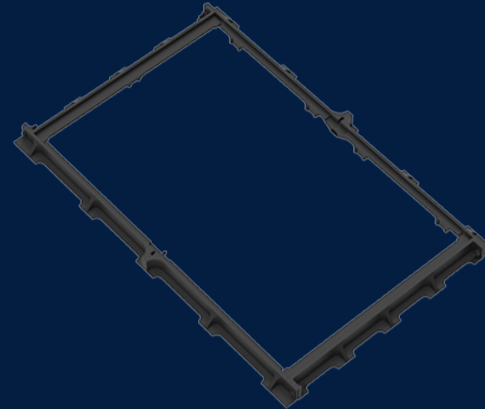

Features & benefits

Nationally approved cover range for key industry authorities

Our cast iron cover range has been approved for use by key industry authorities across various sectors.

Custom branding available

Customisation of our cast iron covers is available to showcase your company's branding and/or the cover's unique application.

Locking and security capabilities

Our cast iron cover range has locking and security capabilities to ensure the utmost protection for your valuable assets.

Full specifications

Material	Ductile iron covers are manufactured from spheroidal graphite cast iron to achieve specified tensile strength and elongation requirements. Ductile iron covers can be utilised in a variety of applications to meet strength and durability requirements.
Australian Standards	Cast iron covers are manufactured a Class D load rating (ultimate limit state design of 900kN) under the Australian Standard AS/NZ 3996, thereby making cast iron covers suitable for docks, wharves and airport runways.



Contact Us

Email: sales@cubis-systems.com.au

Phone: 1800 665 356