


# AX S™ MANHOLE COVER FOOTWAY CAST IRON 797x625


Product Code: 50201414

Our robust cast iron cover range is used across various industry sectors, including telecommunications, energy, rail, defence, trade waste and stormwater. Our cast iron cover range delivers solutions proven for their strength and durability.

 MATERIAL  
Ductile Cast Iron

 SIZE  
797mm (L) x 625mm (W) x 38mm (D)

 LOAD RATING  
B

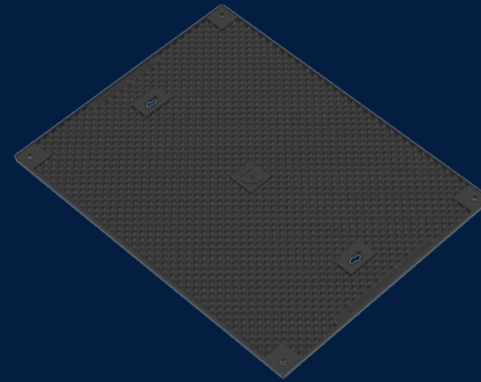

## Features & benefits

Nationally approved cover range for key industry authorities

Our cast iron cover range has been approved for use by key industry authorities across various sectors.

Locking and security capabilities

Our cast iron cover range has locking and security capabilities to ensure the utmost protection for your valuable assets.

Encasement options available

Our cast iron covers have various encasement options available to ensure that your cover fits precisely with your pit of choice.



## Full specifications

Material	Ductile iron covers are manufactured from spheroidal graphite cast iron to achieve specified tensile strength and elongation requirements. Infrastructure Product Australia' ductile iron covers are in accordance with requirement specified in AS1831 and AS3996. Ductile iron covers can be utilised in variety of applications to meet strength and durability requirements.
Australian Standards	Infrastructure Product Australia' cast iron cover range is designed and built up to a Class D load rating, meeting the Australian Standard AS/NZ 3996.
Load Rating	Infrastructure Product Australia' cast iron covers are manufactured up to a Class G load rating (ultimate limit state design of 900kN) under the Australian Standard AS/NZ 3996, making cast iron covers suitable for docks, wharves and airports runways.