


ASSEMBLY MANHOLE FRAME AND COVER 4 PART

Product Code: 50201032

Our full Cast Iron Cover range delivers a durable and robust solution that can be applied in industry sectors including Communications, Energy, Transportation and Water. This 4 part Manhole cover/frame assembly can be used with PF4, PF12 and PF20 Manholes

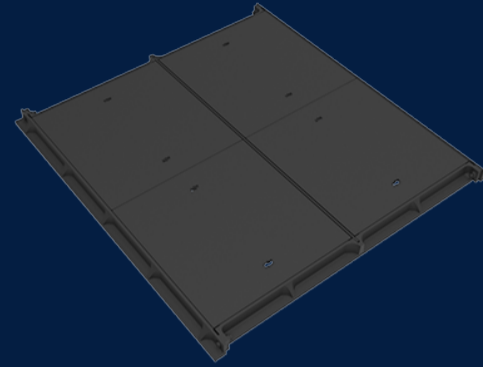

 MATERIAL
Ductile Cast Iron

 SIZE
1420mm (L) x 1329mm (W) x 60mm (D)

 LOAD RATING
B

Features & benefits

Superior design that meets Australian Standards

Infrastructure Products Australia cast iron cover range is designed and built up to a Class D load rating, meeting the Australian Standard AS/NZ 3996.

Locking and security capabilities

Our cast iron cover range has locking and security capabilities to ensure the utmost protection for your valuable assets.

Personalised for your Client, Customer or Project

We can customise these cast iron covers to showcase a company's company or the cover's unique application.



Full specifications

Material

Ductile iron covers are manufactured from spheroidal graphite cast iron to achieve specified tensile strength and elongation requirements. Ductile iron covers can be utilised in a variety of applications to meet strength and durability requirements.