
NON-ACM C



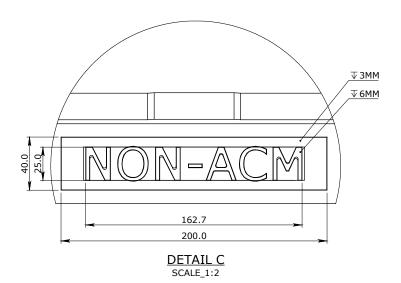

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

		LVVI	JEN BRID								
1	3									CHK / APPR:	
	2	2								DATE:	
	1										
	Rev.	v. DESCRIPTION				DATE		BY	APPROVED	RPEQ DOCUMENT #:	
	GENERAL TOLERANCES REVIS					SION CONTROL					
	NOM	NOMINAL: UP TO 1000mm 1M AN			ABOVE		FLATNESS: (NOT INCLUDING BROOME FINSH)  ±4mm PER 1M WIDTH  IN 1M LENGTH			WEIGHT: 642.69Kg	
J	TOLE	±5mm 1mm IN 200mm UF A MAXIMUM OF 20				MATERIAL: CONCRETE FIBRE 40MPA IRF REF:					

CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741 91 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444 THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS

CONCRETE FIBRE 40MPA

AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL CONVENIENT DESCRIPTION AND ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

ISSUED FOR CLIENT REVIEW ONLY **ISSUE** DATE CLIENT APPROVAL 1/03/2021 DRAFTED DATE: PART/PRODUCT # ORDER # 1/03/2021 DRAFTED BY: REINFORCEMENT COMPUTATION TEM TYPE DATE LAST SAVED 1/03/2021 LAST SAVED BY: ACHAO  $\oplus \Box$ J8 SERIES PIT -CLASS B DRAWN TO AS 1100 DO NOT SCALE FROM SHEET 50201069-NONACM 1 / 1